



Call the Nolan Sales Team on
0845 409 5805

Head Office
Unit 1, St Ivel, Llanstephan Road, Johnstown, Carmarthen SA31 3BP

Cardiff Showroom
166 Richmond Road, Roath, Cardiff CF24 3BX

www.nolanupvc.co.uk



ALUMINIUM
Residential Entrance Door

Make an individual statement and add value to your home
with a secure new Advanced Plus Entrance Door.



Advanced plus
system



www.nolanupvc.co.uk

ALUMINIUM Residential Entrance Door



Make an individual statement and add value to your home with a secure new Advanced Plus Entrance Door. Rest assured that your new door will give you and your family complete protection from the elements and will definitely deter any unwelcome intruders. All doors are fitted with high security multi-point locking systems and come complete with a choice of customisable door furniture.

Design Features


- Designed specifically for the UK market place
- Unique Polyamide Euro groove design (Patent Pending)
- Sculptured detail that creates a picture frame view through the door
- Designed to incorporate standard and security hardware using the same prep detail
- Accepts a full range of restrictors and access control devices
- Fully integrates with the Advanced System Plus Window Range

Fabrication Benefits

- Fully adjustable keeps ensures flexibility onsite
- Available in both crimp and mechanical joint options to allow ease of on site assembly
- Bespoke jigs and tooling dramatically reduces fabrication times
- Beaded sash profile for ease of onsite glazing
- Utilises transoms, mullions and midrails from the Advanced Plus window range

Configurations

Advanced Plus Entrance Doors are available in a wide range of styles and designs. Doors are made to your exacting requirements and can include Georgian, diamond and leaded designs in the glass, decorative aluminium panels and a choice of hardware.

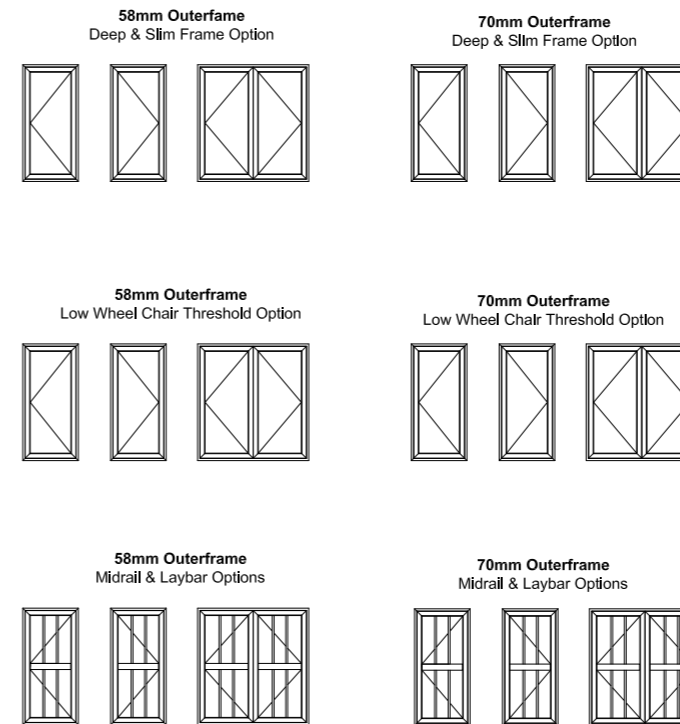

Midrail & Laybars can be added to the doors to customise and create any style and design



Options

- Inward and outward opening for both single and double doors
- Slim and deep outerframes including low thresholds to suit any application
- Glazing size range of 28mm to 44mm
- Low threshold option to comply to Part M – Building Regulation
- Full range of suited and customisable hardware
- Available in any standard RAL colour and dual colour option

Performance

- PAS23 for Weather Performance
- PAS24 for Enhanced Security
- Multi point locking mechanisms for enhanced security
- Cloaking feature conceals lock and prevents any access to locking points
- Single Door U Value 1.8 w/m² K – Double Door U Value 1.9 w/m² K

Sizing

Minimum Width	Maximum Width
700mm	2000mm**
Minimum Height	Maximum Height
1800mm	2400mm**
Maximum Sash Weight	
80kgs**	


Variations

Individual panel width not to exceed 1000mm
Panels heights, widths and weights are dependant on style and design.


**The sizes detailed above are for guidance only.

Please contact the Beaufort technical office for further details.

Jamb Detail

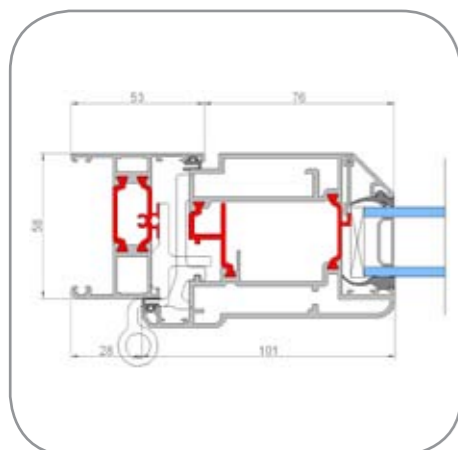

Cill Detail

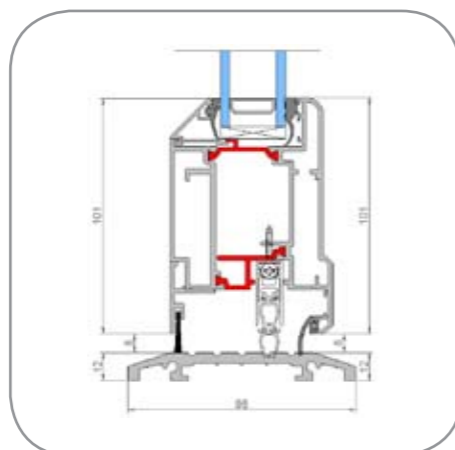

Interlock Detail

